
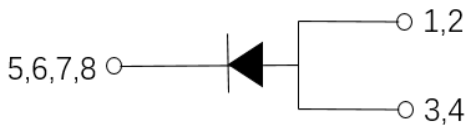


Schottky Diodes

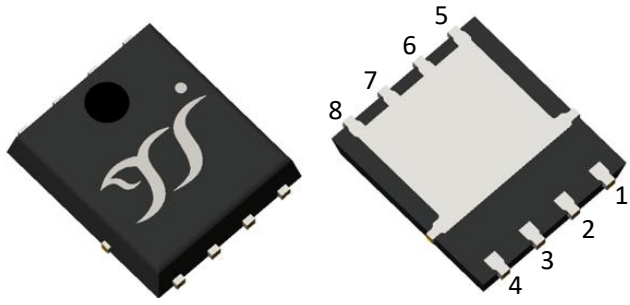

Features

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Part no. with suffix "Q" means AEC-Q101 qualified

Typical Applications

Typical applications are in switching power supplies, converters, automotive, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** PDFN5060
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBR10100P5
Device marking code			MBR10100P5
Repetitive peak reverse voltage	V _{RRM}	V	100
Average Rectified Output Current @60Hz -sine wave, T _c =145°C	I _O	A	10
Forward Surge Current (Non-repetitive) @60Hz half-sine wave, 1 cycle, T _a =25°C	I _{FSM}	A	150
Current Squared Time @1ms≤t≤8.3ms T _J =25°C	I ² t	A ² s	93
Storage Temperature	T _{stg}	°C	-55 ~ +175
Junction Temperature	T _J	°C	-55 ~ +175

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Typ	Max
Instantaneous forward voltage	V _F	V	I _F =10A	T _J =25°C	0.8	0.85
			I _F =10A	T _J =125°C	0.67	0.74
Typical junction capacitance	C _J	pF	V _R =4V, f=1 MHz		270	-
Instantaneous reverse current	I _R	uA	V _R =100V	T _J =25°C	-	10
				T _J =125°C	-	3000



MBR10100P5

■ Characteristics (Typical)

Fig.1: Forward Current Derating Curve

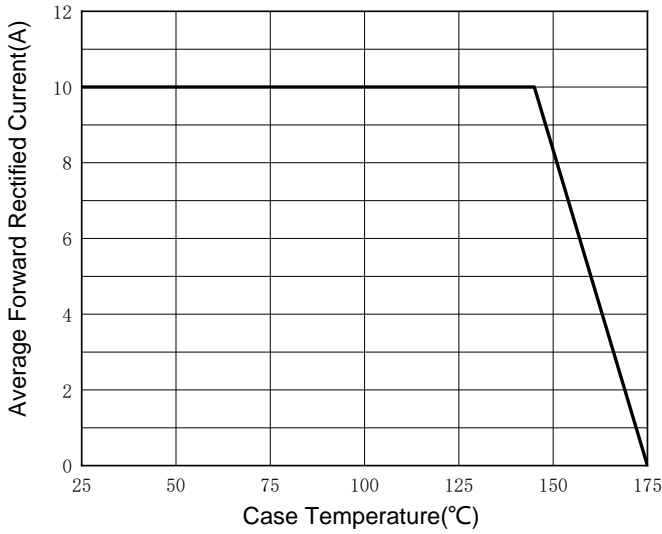


Fig.2: Forward Surge Current Capability

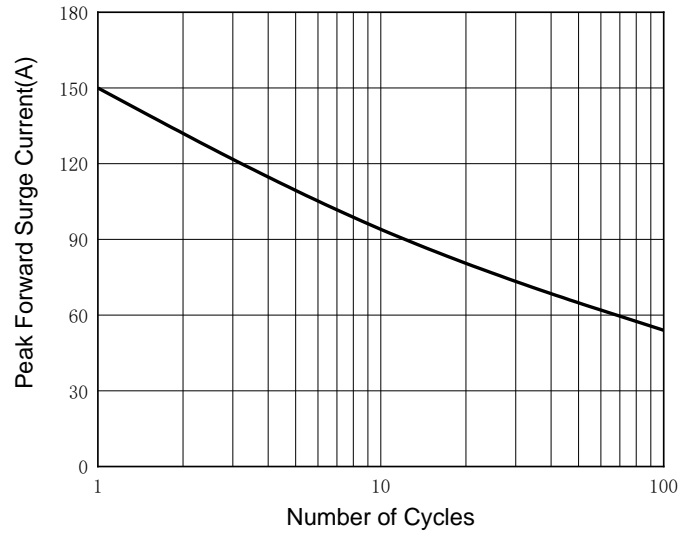


Fig.3: Typical Instantaneous Forward Characteristics

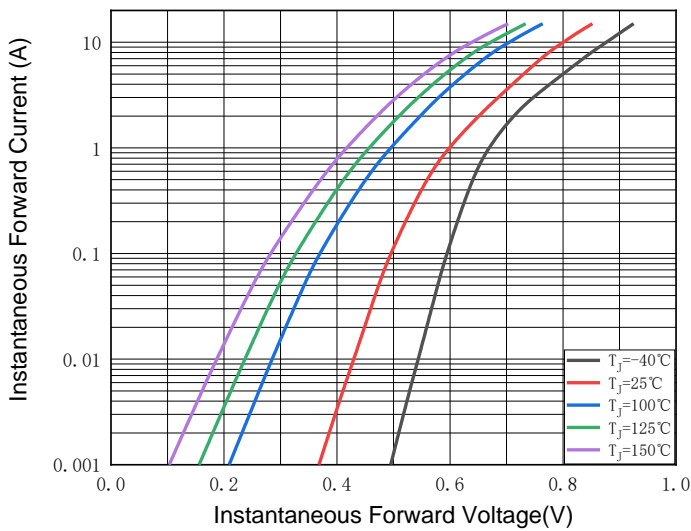


Fig.4: Typical Reverse Leakage Characteristics

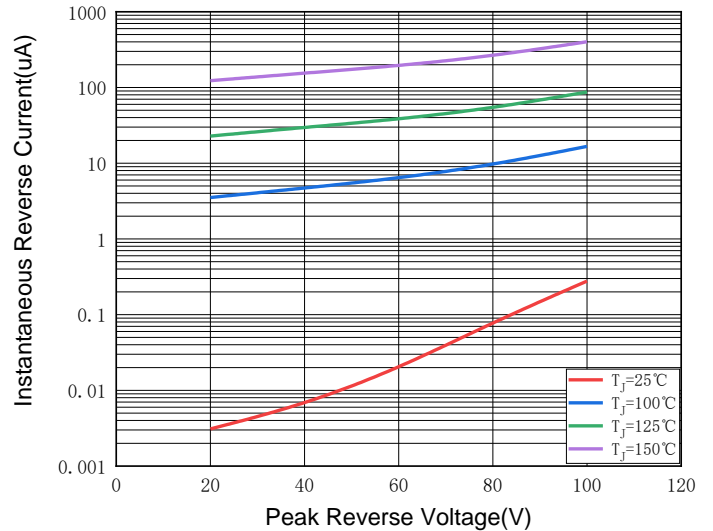


Fig.5: Typical Junction Capacitance


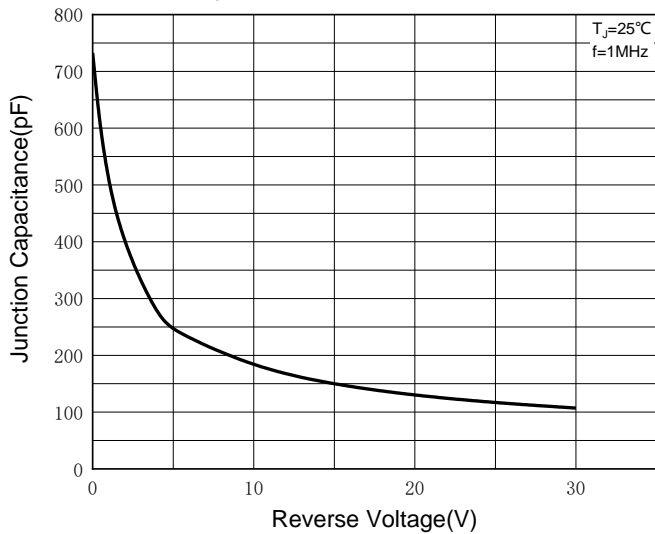


Fig.6: Transient Thermal Response, Junction to Case



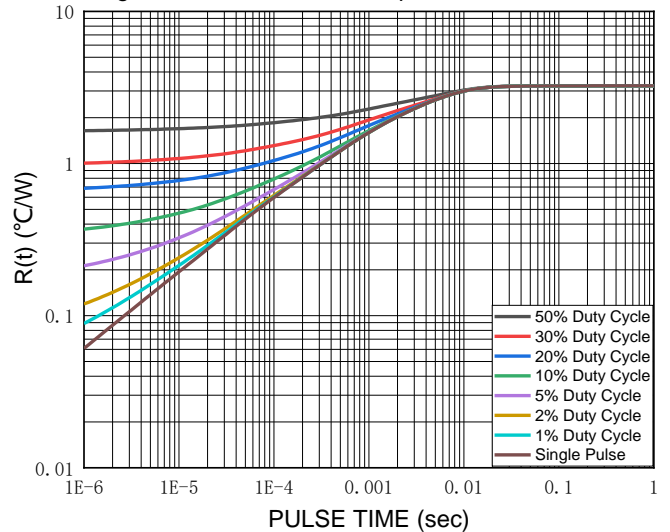

MBR10100P5

■ Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBR10100P5
Typical thermal resistance	$R_{\theta J-A}$	$^\circ\text{C/W}$	55 ⁽¹⁾
	$R_{\theta J-C}$	$^\circ\text{C/W}$	3.5 ⁽²⁾

Note:


(1) Thermal resistance between junction and ambient mounted on P.C.B with 25.4mm*25.4mm copper pad areas.

(2) Thermal resistance between junction and case.

■ Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MBR10100P5	Approximate 0.105	5000	10000	100000	13" reel

■ Marking Information




Note:

1. All marking is at middle of the product body
2. All marking is in laser printing
3. XXXXXX is marking code, like MBR10100P5 marking code is MBR10100P5
4. Body color: Black




MBR10100P5


■ Outline Dimensions & Suggested Pad Layout

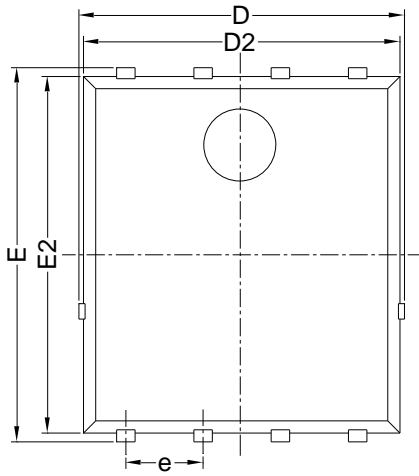


Top View

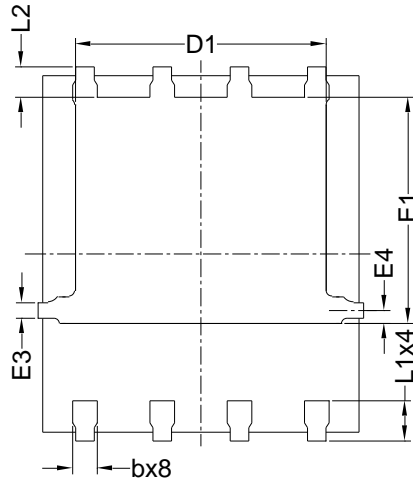

Bottom View

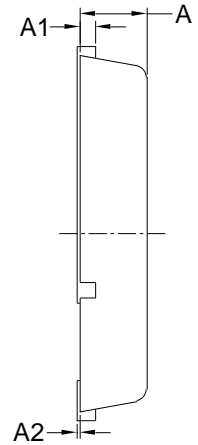

Side View

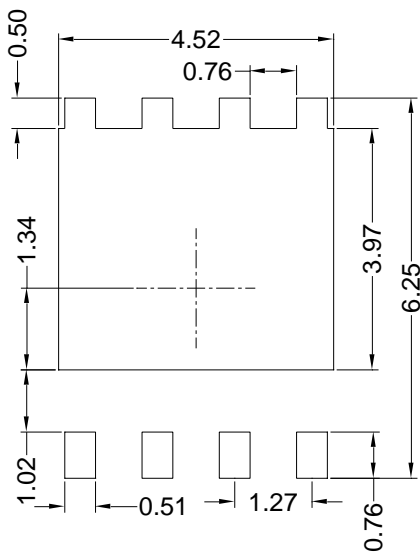

Suggested Solder Pad Layout
Top View

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	5.15	5.35	5.55
E	5.95	6.15	6.35
A	1.00	1.10	1.20
A1	0.254 BSC		
A2			0.10
D1	3.92	4.12	4.32
E1	3.52	3.72	3.92
D2	5.00	5.20	5.40
E2	5.66	5.86	6.06
E3	0.254 REF		
E4	0.21 REF		
L1	0.56	0.66	0.76
L2	0.50 BSC		
b	0.31	0.41	0.51
e	1.27 BSC		

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.10 mm.
3. The pad layout is for reference purposes only.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.